
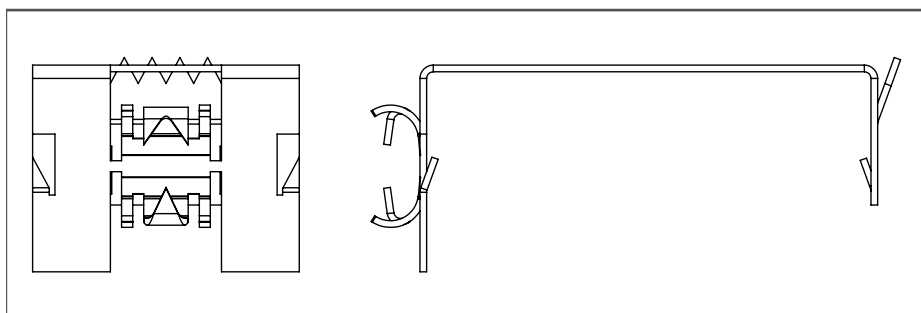


→ DATA SHEET- GRIP-LINK™ FLAT

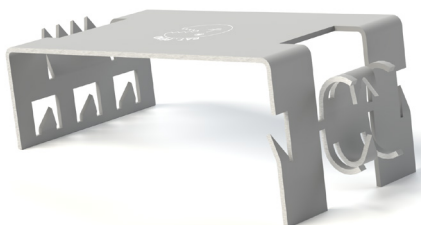


TECHNICAL SPECIFICATIONS

TERRAGRIF®		STANDARDS	
Reference	MBS03339	Contact resistance Rc	IEC 61730 - 2
Cable specifications	6mm² H07VK6	Flow capacity	IEC 61180
Material and weight	Inox 301 ≈ 7g	Salt Spray Corrosion	IEC 60060
Packaging	100 pieces/bag	Climate Cycling	IEC 61215 - 2


IMPLEMENTATION

BasicRail D-/S- Dome D-/S- Dome 6	SingleRail	SolidRail

MiniRail

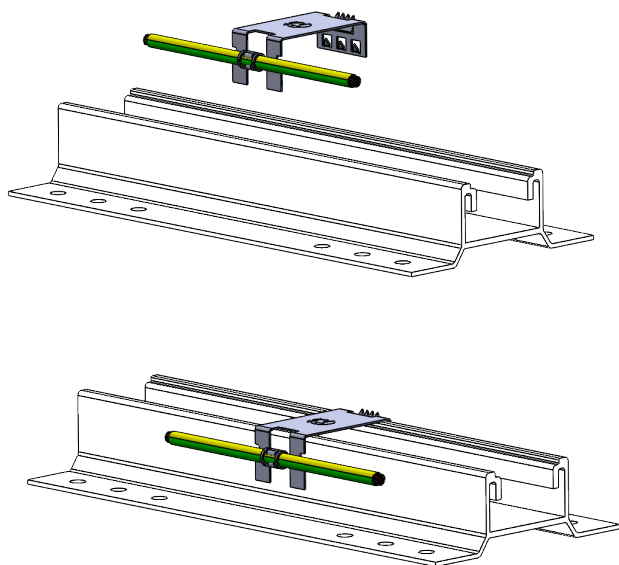


MultiRail

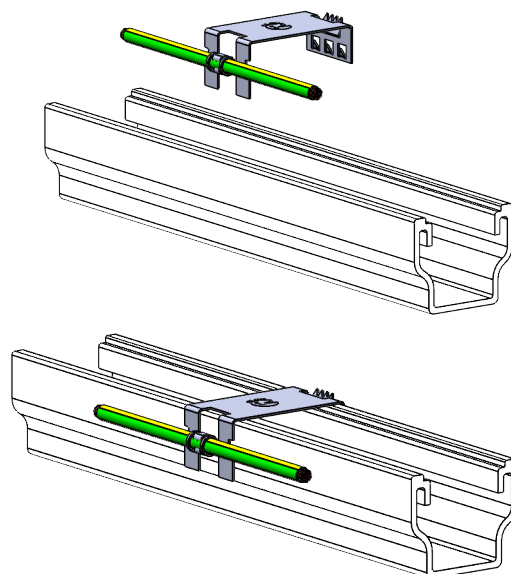


MOUNTING INSTRUCTIONS


BasicRail • D-/S- Dome • D-/S- Dome 6

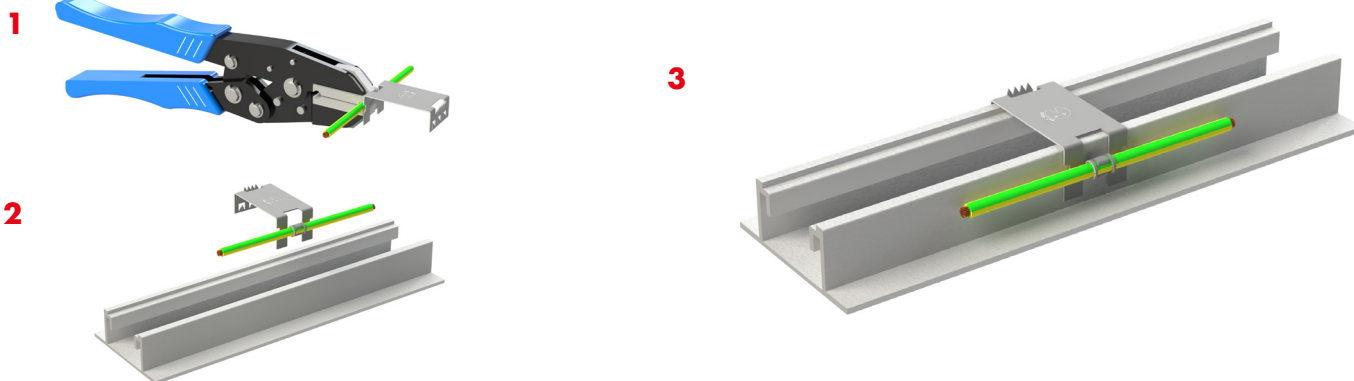


SingleRail

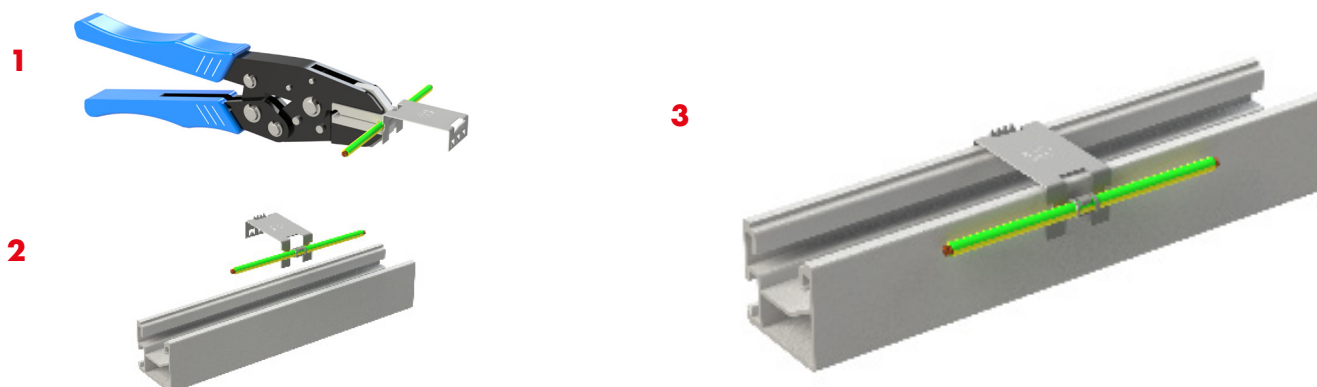

SolidRail

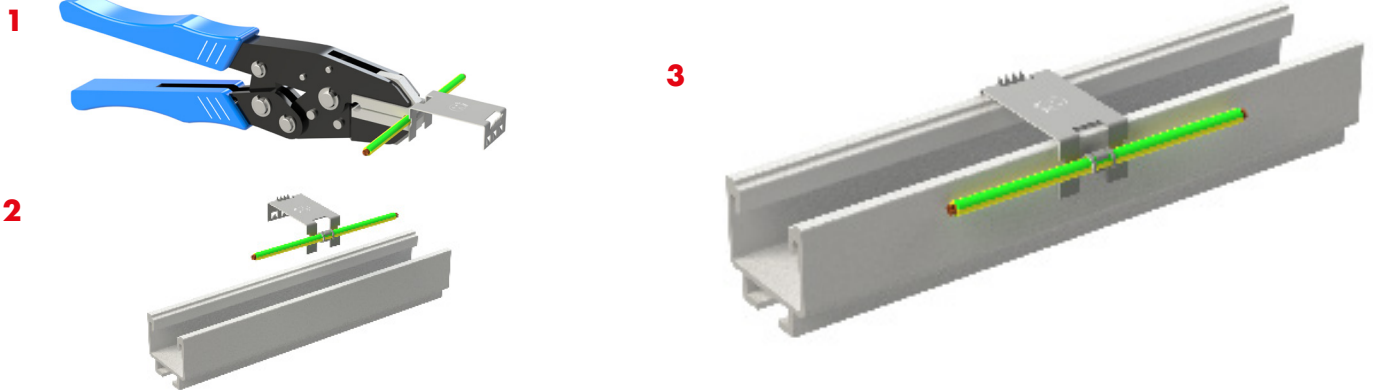

MiniRail

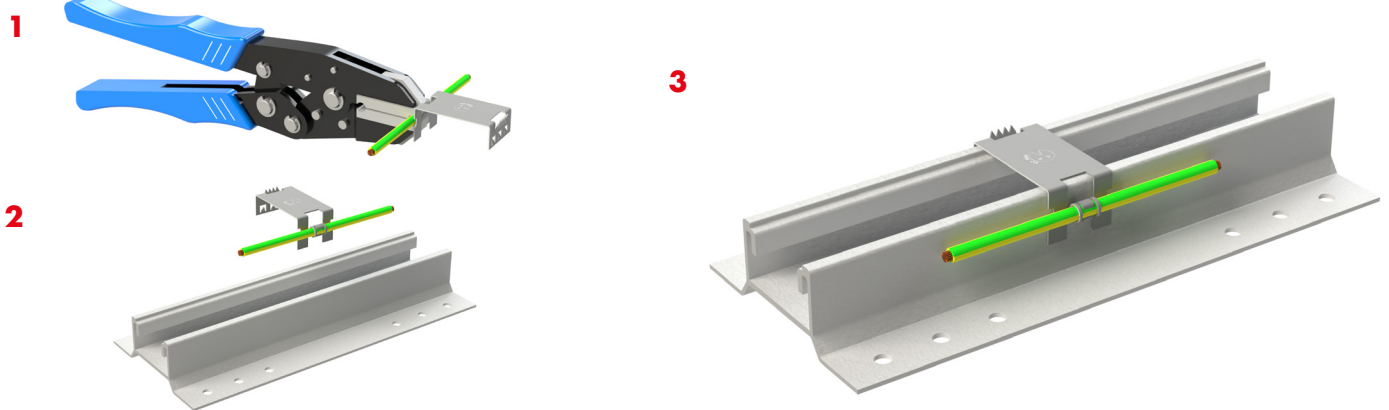

MultiRail

